


FPL 85/27 NI

FOR FLOORS WITH COATING SYSTEMS (SHORT AAS SHEETS)

MIGUTAN

WATERTIGHT EXPANSION JOINT SOLUTIONS

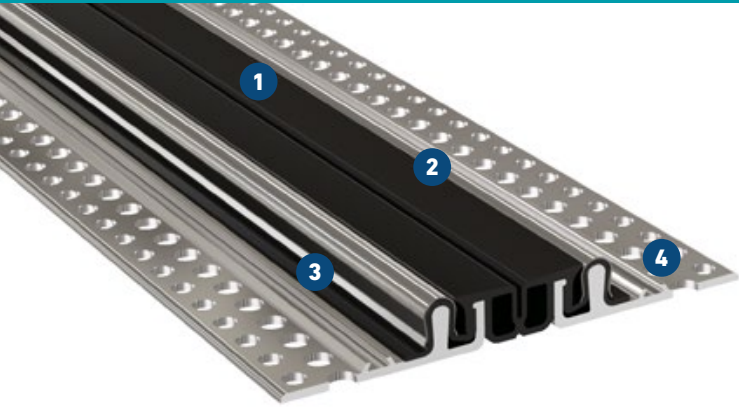

- 1 Central insert on top surface**
Visual inspection and replacement without disrupting the surface
 - 2 Stainless steel clip-on-cappings, made of spring steel**
Easy and cost saving assembly
 - 3 100% watertight**
In connection with a coating system and connection joint
 - 4 MultiHole mounting brackets**
for secure fixing
- Connection joint with connection joint filler cover AAP 110/23**
Proper and economical connection of the coating system

Expansion joint cover	Joint width max. $b_f \text{ max}$ [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Total width b_t [mm]	Joint height h [mm]	Load bearing capacity [kN]	Load bearing capacity [kN]	Load bearing capacity [kN]	Load bearing capacity solid plastic tyres [kg/mm]
FPL 85/27 NI	50	40 (±20)	85	214	27	35	300	70	

Sealing against nonpressurized water.

