


ESG 33

FOR FLOORS WITH HYGIENIC REQUIREMENTS, RESISTANT TO AGGRESSIVE FLUIDS

MIGUTEK

JOINT COVERS FOR EXPANSION JOINTS

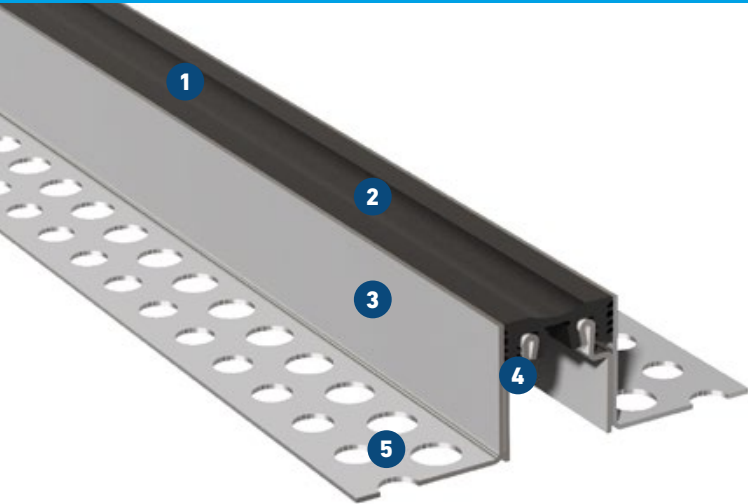

- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Smooth visible surface for easy cleaning**
Antibacterial and physiologically safe
- 3 Solid stainless steel brackets**
Resistant to aggressive media (e.g. sea water)
- 4 Multi directional movement**
Expansion joint cover takes on settling
- 5 Secure fixing with MultiHole mounting bracket**
Firm bond and extraordinary gripping strength

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity*	Load bearing capacity*
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]	[kN]	[kN]
ESG 33/15	30	6 (± 3)	33	139	15	30	30
ESG 33/35	30	6 (± 3)	33	108	35	30	30
ESG 33/40	30	6 (± 3)	33	108	40	30	30
ESG 33/50	30	6 (± 3)	33	108	50	30	30

* no continuous use

All info on load capacities apply to doweled, not to floating installation.
Larger installation heights on request.

Material: 1.4301 (alloy 304)

Production length: 3 m (ESG 33/15: 2 m)

Standard colours: black, grey, beige, brown

Stainless steel: mill finish

Wall connections: E1, E3, E4

